



# IAC-IMX6-CM V3.01 Core Board Hardware Manual

Version: 2.0  
2022.01

QIYANG INTELLIGENTTECHNOLOGY Co., Ltd

Copyright Reserved

## Catalogue

Notice: This manual introduces the hardware interface of the mainboard.....	3
I. Preface .....	3
1.1 Company Profile .....	3
1.2 Suggestion for Using IAC-IMX6-CM V3.01 Core board.....	4
II .Product Introduction .....	4
2.1 Chipset Introduction.....	4
2.2. IAC-IMX6-CM V3.01 Core Board.....	6
III. Core Board's Picture .....	8
Pin Definition on J1,J2,J3.....	9
PIN Definition on J1: .....	9
PIN Definition on J2: .....	10
PIN Definition on J3: .....	11
IV. Size & Structure .....	12
Top- Layer.....	12
Bottom -Layer .....	12
V. Environment Test.....	13
High & Low Temperature Test : -20°C~70°C.....	13
VI.EMC Test: .....	15
Radiated Emission Test Result.....	15
VII. Software Description.....	19
IX. Remark.....	19

**Notice: This manual introduces the hardware interface of the mainboard**

## I. Preface

### 1.1 Company Profile

Zhejiang Qiyang Intelligent Technology Co., Ltd. Was established in Hangzhou in 2007. It is a National High-tech Enterprise focusing on the development, production and sales of ARM embedded products. More than 10 years of accumulation and precipitation have successfully constructed a service chain from product development to mass production.

As the core of the company, Qiyang R&D team is composed of more than 30 embedded engineers, who committed to providing users with easy-to-use embedded hardware, software tools and customized product solutions. Our products and solutions have been widely used in industrial control, Internet of Things, new retail, medical, electricity, environmental monitoring, charging piles and other fields.

The production base established in Zhuji provides a strong guarantee for Qiyang. It covers a over 5,000 square meters area also has 2 SMT production lines, and has passed and strictly followed the ISO9001 quality management system certification to guide production. With the strong production strength, the annual output can reach 1 million sets, ensuring the delivery time and solving the worries of users.

Qiyang has a complete sales market network, professional sales and after-sales team providing users with a full range of technical support and services. The business has spread to more than 120 countries and regions, and has successfully helped more than 2,000 users to quickly and efficiently bring products to the market.

The combination and extension of R&D, production capacity and market has laid a solid foundation for Qiyang to become a professional and global supplier of embedded software and hardware.

We offer:

Multi-platform software/hardware products

NXP, Rockchip, MTK, Renesas, TI, Atmel, Cirrus Logic and other multi-platform ARM development boards/core boards/industrial control boards and peripheral hardware products, as well as supporting tools and software resources to support users' rapid

secondary development.

Customized service

Give full play to the accumulation of technology on the ARM platform, Linux, Android, and Ubuntu operating systems to provide users with customized embedded product services (OEM/ODM).

Thank you for using Qiyang Intelligent products. We will spare no effort on providing you with technical assistance! Wish you success in your work!

## 1.2 Suggestion for Using IAC-IMX6-CM V3.01 Core board

1. Please read the instructions firstly, before using the single board computer;
2. Before using, please check the packing list and see whether there is a missing file in the CD;
3. Please understand the basic structure and composition of **IAC-IMX6-CM V3.01** core board, including the hardware resource allocation etc.;
4. If you need to develop on Android system and burn program into the development board, in addition to this document, we also suggest reading another document **IAC-IMX6-Kit Android User Manual**;
5. **IAC-IMX6-CM V3.01** core board accept batch order.

# II. Product Introduction


## 2.1 Chipset Introduction

IAC-IMX6-CM V3.01 Core Board, it adopts Freescale i.MX6 processor, Cortex-A9 core with 1G Hz and can be compatible with solo/dual /quad micro processor for upgrading. This mainboard is with standard i.MX6 Dual Core:

The i.MX 6Dual family provides dual cores running up to 1.0 GHz with 1 MB of L2 cache and 64-bit DDR3 or 2-ch., 32-bit LPDDR2 support. Integrated FlexCAN, MLB bus, HD grade NEON SIMD Media

Accelerator, Triple Play 3D/2D/VG Accelerator, 1080P video codec, PCI Express<sup>®</sup> and SATA2 provide excellent connectivity, while integration of LVDS, MIPI display port, MIPI camera port and HDMI v1.4, the i.MX 6Dual provides a scalable solution for consumer, automotive and industrial applications.

Function diagram is as shown:

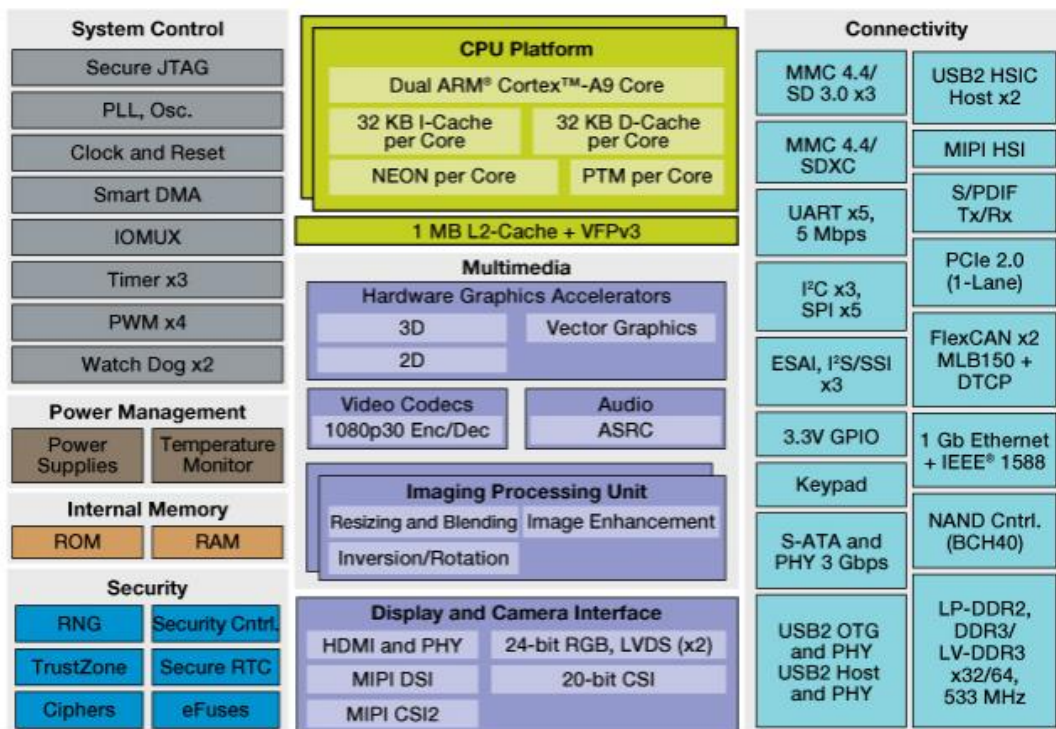**i.MX 6Dual Applications Processor Block Diagram**


Picture 1

- ◆ ARM® Cortex™-A9, 1.0 GHz, compatible with solo/dual/quad core;
- ◆ 1MB L2 Cache, 32 KB instruction and data caches, NEON SIMD Media Accelerator;
- ◆ 2D/3D/VG Accelerator, 1080P h.264 video hardware codec, support dual 720P video encoding;
- ◆ 1x 20-bit parallel, MIPI-CSI2 (4-channel), three simultaneous inputs;
- ◆ 2-ch HOST USB HSIC, 1-ch OTG and 1-ch HOST USB integrated PHY;
- ◆ 1 industrial gigabit Ethernet MAC (10/100/1000MHz);
- ◆ 2-ch CAN ports, each channel can up to 1 Mbps, support CAN2.0;
- ◆ 3 SD/MMC 4.4 and 1 SDXC;
- ◆ 5 SPI, 5 UART, 3 I2C, 4 PWM;
- ◆ Integrated MIPI-HSI interface, 1-ch PCIe2.0 interface;
- ◆ Dual LVDS interface, support resolution up to 2048\*1536;
- ◆ Freescale PF100 PMU;
- ◆ High Assurance Boot, cryptographic cipher engines, random number generator, and tamper detection



## 2.2. IAC-IMX6-CM V3.01 Core Board

Core Board Configuration	CPU PN#	MCIMX6D5EYM10AD
	CPU	Freescale i.MX6D processor, ARM® Cortex™-A9 core, 1.0 GHz, compatible with solo-core/dual-core/quad-core
	GPU	2D+3D (3 GPUs), 176 Mtri/s
	VPU	2D/3D/VG Accelerator,1080P h.264 video hardware codec, support dual 720P video encoding;
	RAM	1GB DDR3 (Std.) (*2GB Opt.)
	Flash	4GB EMMCFlash (Std.) (*8GB,16GB,32GB,64GB Opt.)
	Power Input	DC 5V
Electrical Specification	Size	86 mmx 60mmx 1.5mm
	Connector	Board To Board Receptacle
	Pins' Pitch	0.8mm
	Pin Numbers	300*PIN
	Craft	8-Layer
	Material	High TG material,
Connector	Display	Support LCD RGB (*Several PINs can be multiplexed for other signals)
		Support 1*LVDS (Dual Channel), Support resolution up to 2048*1536
		Support MIPI-DSI (Dual Channel)
		Support 1*HDMI1.4 , HD video and audio output
	UART	Total:5*UART, including 1*Debug UART(*Several PINs can be multiplexed for other signals)
	USB	1*USB OTG

	1*USB HOST (2.0) HSIC	
Ethernet	1*Gigabit Ethernet, by using <b>YT8511</b> PHY chipset to support RGMII model, self-adaptive for 10M/100M/1000Mbps.	
PWM	4*PWM <b>(*Several PINs can be multiplexed for other signals)</b>	
I2C	3*I2C <b>(*Several PINs can be multiplexed for other signals)</b>	
SPI	5*SPI <b>(*Several PINs can be multiplexed for other signals)</b>	
PCIE	1*PCIE	
CSI	2*CSI DVP Type	
MIPI-CSI2 (Four Channel)	1*MIPI-CSI2 (Four Channel)	
SDIO	1*SDIO	
SATA	1*SATA. supports SATA II	
CAN	2* CAN, supports CAN 2.0 protocol. <b>(*Several PINs can be multiplexed for other signals)</b>	
Audio	MIC audio input	
	McASP type, Binaural audio output	
EIM	Available	
GPIO	Available	
Electronic	Power input	+5V
	Operation temperature	-20°C ~ +70°C (Std.) <b>(* -40°C ~ +85°C (Opt.))</b>
	Humidity	5%-95%, Non-condensation
Software	OS	Support Android 6.0, Linux 4.1.15
	Data	Provide BSP, DEMO, and testing APK
	Application	Facial recognition, IoT, Intelligent appliances, Advertising machine, POS, Vehicle control terminal



### III. Core Board's Picture

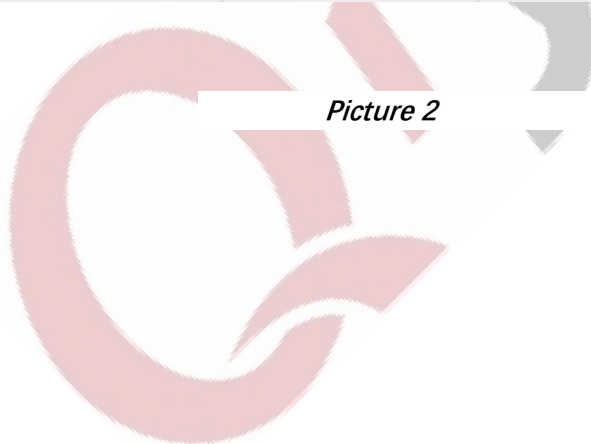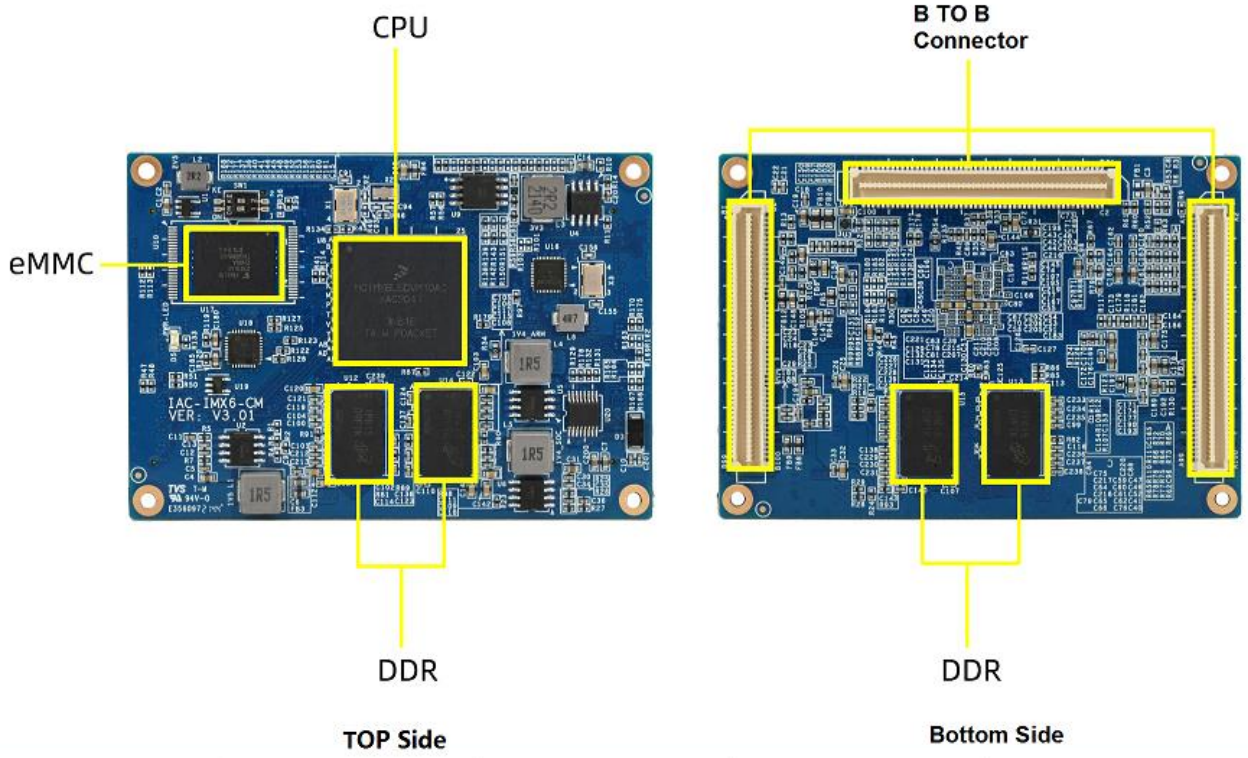

Picture 2

Picture 3



## Pin Definition on J1,J2,J3

### PIN Definition on J1:

引脚号	默认定义	I/O	引脚号	默认定义	I/O
1	USB_H1_VBUS	/	2	USB_OTG_VBUS	/
3	USB_H1_DP	/	4	USB_OTG_DN	/
5	USB_H1_DN	/	6	USB_OTG_DP	/
7	GPIO_1	GP101_I001	8	USB_OTG_ID	/
9	GPIO_2	GP101_I002	10	GND	/
11	CSI0_HS	GP105_I019	12	PCIE_CLK_N	/
13	CSI0_VS	GP105_I021	14	PCIE_CLK_P	/
15	CSI0_PCLK	GP105_I018	16	GND	/
17	CSI0_PWDN	GP105_I020	18	PCIE_RXM	/
19	I2C1_SDA	GP105_I026	20	PCIE_RXP	/
21	I2C1_SCL	GP105_I027	22	GND	/
23	DBG_TXD	GP105_I028	24	PCIE_TXM	/
25	DBG_RXD	GP105_I029	26	PCIE_TXP	/
27	CSI0_DAT12	GP105_I030	28	GND	/
29	CSI0_DAT13	GP105_I031	30	HOTPLUG_DET	/
31	CSI0_DAT14	GP106_I000	32	HDMI_CEC_IN	/
33	CSI0_DAT15	GP106_I001	34	GND	/
35	CSI0_DAT16	GP106_I002	36	HDMI_CLKM	/
37	CSI0_DAT17	GP106_I003	38	HDMI_CLKP	/
39	CSI0_DAT18	GP106_I004	40	GND	/
41	CSI0_DAT19	GP106_I005	42	HDMI_D0M	/
43	GND	/	44	HDMI_D0P	/
45	MIC_INP	/	46	GND	/
47	MIC_INM	/	48	HDMI_D1M	/
49	LINE_INL	/	50	HDMI_D1P	/
51	LINE_INR	/	52	GND	/
53	HPROUT	/	54	HDMI_D2M	/
55	HROUT	/	56	HDMI_D2P	/
57	GND	/	58	GND	/
59	UART5_TXD	GP104_I008	60	UART4_TXD	GP104_I006
61	UART5_RXD	GP104_I009	62	UART4_RXD	GP104_I007
63	CAN2_TXD	GP104_I014	64	CAN1_TXD	GP104_I010
65	CAN2_RXD	GP104_I015	66	CAN1_RXD	GP104_I011
67	I2C3_SCL	GP101_I005	68	I2C2_SCL	GP104_I012
69	I2C3_SDA	GP101_I006	70	I2C2_SDA	GP104_I013
71	GND	/	72	GND	/
73	LVDS1_TXN0	/	74	LVDS0_TXN0	/
75	LVDS1_TXP0	/	76	LVDS0_TXP0	/
77	GND	/	78	GND	/
79	LVDS1_TXN1	/	80	LVDS0_TXN1	/
81	LVDS1_TXP1	/	82	LVDS0_TXN2	/
83	GND	/	84	GND	/
85	LVDS1_TXN2	/	86	LVDS0_TXN2	/
87	LVDS1_TXP2	/	88	LVDS0_TXP2	/
89	GND	/	90	GND	/
91	LVDS1_CLKN	/	92	LVDS0_CLKN	/
93	LVDS1_CLKP	/	94	LVDS0_CLKP	/
95	GND	/	96	GND	/
97	LVDS1_TXN3	/	98	LVDS0_TXN3	/
99	LVDS1_TXP3	/	100	LVDS0_TXP3	/

## PIN Definition on J2:

引脚号	默认定义	I/O	引脚号	默认定义	I/O
1	GND	/	2	GND	/
3	GMDN1	/	4	GMDP2	/
5	GMDP1	/	6	GMDN2	/
7	GND	/	8	GND	/
9	GMDN0	/	10	GMDP3	/
11	GMDP0	/	12	GMDN3	/
13	LED_LINK	/	14	LED_ACT	/
15	GND	/	16	GND	/
17	SATA_TXP	/	18	SD2_CLK	GP101_I010
19	SATA_TXM	/	20	SD2_CMD	GP101_I011
21	GND	/	22	SD2_DAT0	GP101_I015
23	SATA_RXM	/	24	SD2_DAT1	GP101_I014
25	SATA_RXP	/	26	SD2_DAT2	GP101_I013
27	GND	/	28	SD2_DAT3	GP101_I012
29	SD3_CLK	GP107_I003	30	SD3_CMD	GP107_I002
31	SD3_DAT0	GP107_I004	32	SD3_DAT4	GP107_I001
33	SD3_DAT1	GP107_I005	34	SD3_DAT5	GP107_I000
35	SD3_DAT2	GP107_I006	36	SD3_DAT6	GP106_I018
37	SD3_DAT3	GP107_I007	38	SD3_DAT7	GP106_I017
39	EIM_OEN	GP102_I025	40	SYS_RSTN	/
41	EIM_WRN	GP102_I026	42	EIM_LBA	GP102_I027
43	EIM_CS1N	GP102_I024	44	EIM_CS0N	GP102_I023
45	EIM_D17	GP103_I017	46	EIM_D16	GP103_I016
47	EIM_D19	GP103_I019	48	EIM_D18	GP103_I018
49	EIM_D21	GP103_I021	50	EIM_D20	GP103_I020
51	EIM_D23	GP103_I023	52	EIM_D22	GP103_I022
53	EIM_D25	GP103_I025	54	EIM_D24	GP103_I024
55	EIM_D27	GP103_I027	56	EIM_D26	GP103_I026
57	EIM_D29	GP103_I029	58	EIM_D28	GP103_I028
59	EIM_D31	GP103_I031	60	EIM_D30	GP103_I030
61	EIM_WAIT	GP106_I000	62	EIM_BCLK	GP106_I031
63	EIM_AD14	GP103_I014	64	EIM_AD13	GP103_I013
65	DISP0_CLK	GP104_I016	66	EIM_AD15	GP103_I015
67	DISP0_VS	GP104_I019	68	DISP0_HS	GP104_I018
69	DISP0_DE	GP104_I017	70	DISP0_CNTRST	GP104_I020
71	DISP0_DAT1	GP104_I022	72	DISP0_DAT0	GP104_I021
73	DISP0_DAT3	GP104_I024	74	DISP0_DAT2	GP104_I023
75	DISP0_DAT5	GP104_I026	76	DISP0_DAT4	GP104_I025
77	DISP0_DAT7	GP104_I028	78	DISP0_DAT6	GP104_I027
79	DISP0_DAT9	GP104_I030	80	DISP0_DAT8	GP104_I029
81	DISP0_DAT11	GP104_I032	82	DISP0_DAT10	GP104_I031
83	DISP0_DAT13	GP104_I034	84	DISP0_DAT12	GP104_I033
85	DISP0_DAT15	GP104_I036	86	DISP0_DAT14	GP104_I035
87	DISP0_DAT17	GP104_I038	88	DISP0_DAT16	GP104_I037
89	TSC_YP	/	90	TSC_XP	/
91	TSC_XM TSC_YM	/	92	TSC_XM	/
93	GND	/	94	GND	/
95	GND	/	96	GND	/
97	GND	/	98	GND	/
99	GND	/	100	GND	/


### PIN Definition on J3:

引脚号	默认定义	I/O	引脚号	默认定义	I/O
1	GND	/	2	GND	/
3	DSI_CLK0M	/	4	JTAG_TCK	/
5	DSI_CLK0P	/	6	JTAG_TMS	/
7	GND	/	8	JTAG_TDI	/
9	DSI_D0M	/	10	JTAG_TDO	/
11	DSI_D0P	/	12	JTAG_TRSTN	/
13	GND	/	14	GND	/
15	DSI_D1M	/	16	GND	/
17	DSI_D1P	/	18	GND	/
19	GND	/	20	GPIO_4	GP101_1004
21	CSI_D0M	/	22	GPIO_7	GP101_1007
23	CSI_D0P	/	24	GPIO_8	GP101_1008
25	GND	/	26	GPIO_9	GP101_1009
27	CSI_D1M	/	28	GND	/
29	CSI_D1P	/	30	GPIO_16	GP107_1011
31	GND	/	32	GPIO_17	GP107_1012
33	CSI_D2M	/	34	GPIO_18	GP107_1013
35	CSI_D2P	/	36	GPIO_19	GP104_1005
37	GND	/	38	GND	/
39	CSI_D3M	/	40	GND	/
41	CSI_D3P	/	42	GND	/
43	GND	/	44	ON/OFF	/
45	CSI_CLK0M	/	46	GND	/
47	CSI_CLK0P	/	48	GND	/
49	GND	/	50	GND	/
51	GND	/	52	GND	/
53	MLB_SP	/	54	GND	/
55	MLB_SN	/	56	GND	/
57	GND	/	58	GND	/
59	MLB_DP	/	60	GND	/
61	MLB_DN	/	62	GND	/
63	GND	/	64	GND	/
65	MLB_CP	/	66	GND	/
67	MLB_CN	/	68	GND	/


69	GND	/	70	GND	/
71			72	GND	/
73	GND	/	74	GND	/
75	CSII_D13	GP102_1020	76	CSII_PCLK	GP102_1022
77	CSII_D15	GP102_1018	78	CSII_D12	GP102_1021
79	CSII_D17	GP102_1016	80	CSII_D14	GP102_1019
81	CSII_D19	GP105_1004	82	CSII_D16	GP102_1017
83	CSII_D11	GP102_1028	84	CSII_D18	GP106_1006
85	CSII_D9	GP103_1000	86	CSII_D10	GP102_1029
87	CSII_D7	GP103_1002	88	CSII_D8	GP103_1001
89	CSII_D5	GP103_1004	90	CSII_D6	GP103_1003
91	CSII_D3	GP103_1006	92	CSII_D4	GP103_1005
93	CSII_D1	GP103_1008	94	CSII_D2	GP103_1007
95	CSII_DEN	GP103_1010	96	CSII_D0	GP103_1009
97	CSII_VS	GP103_1012	98	CSII_HS	GP103_1011
99	GND	/	100	GND	/

## IV. Size & Structure

### Top-Layer

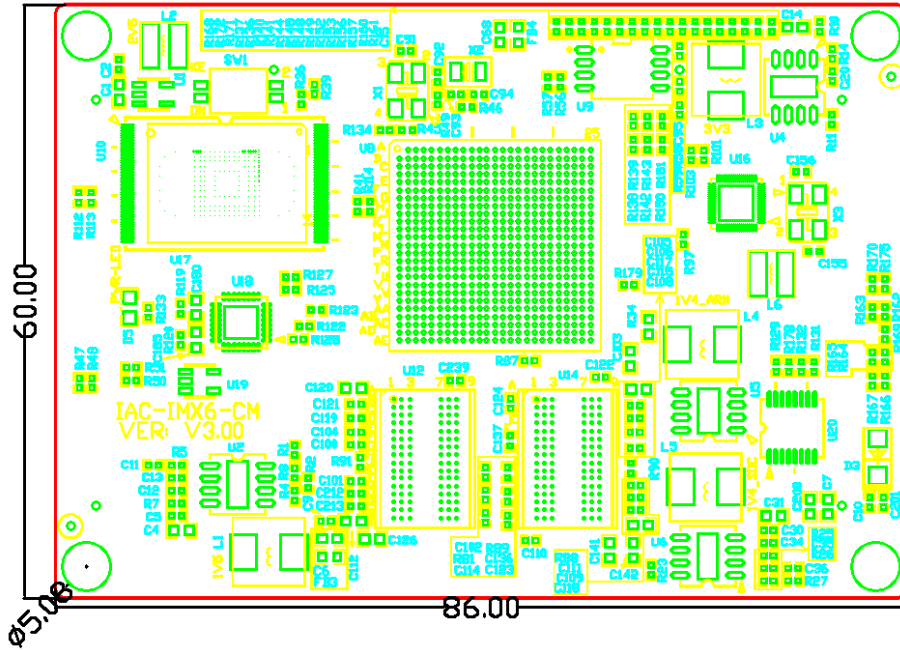

### Bottom -Layer

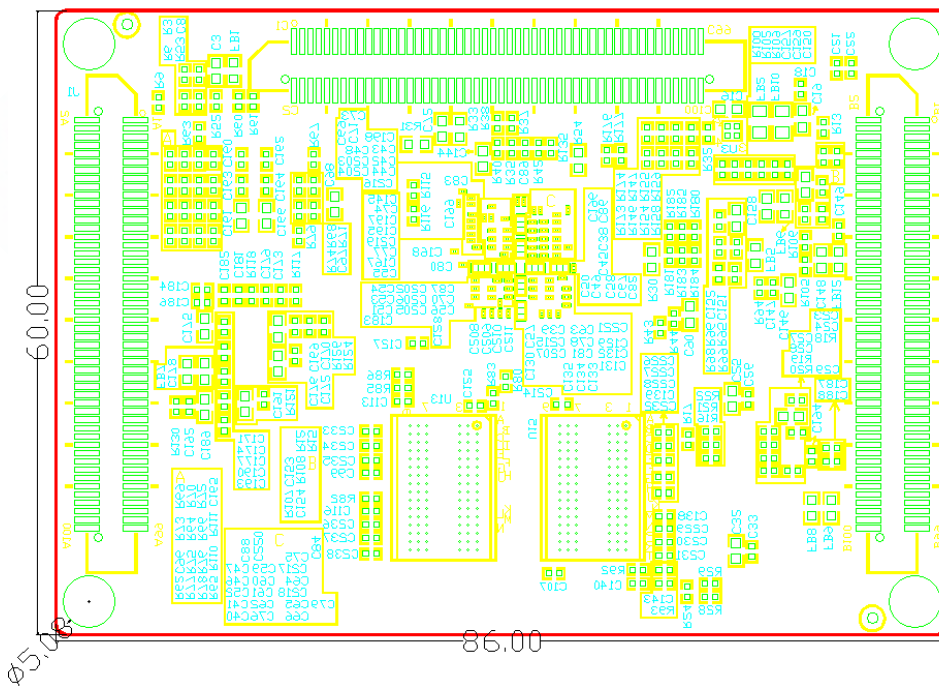

## V. Environment Test

### High & Low Temperature Test : -20°C~70°C

#### 1.1 试验标准 Test Criterion

试验项目	采用标准	试验结果
低温试验 Low Temperature Test	GB/T2423.1-2008	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL
高温试验 High Temperature Test	GB/T2423.2-2008	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL
恒定湿热试验 Steady-state damp heat test	GB/T2423.3-2006	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL
交变湿热试验 Cyclic damp heat test	GB/T2423.4-2008	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL
温度循环试验 Temperature cycle test	GB/T2423.22-2012	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL
振动（正弦）试验 Vibration (Sine)Test	GB/T2423.10-2008	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL
自由跌落试验 Drop Test	GB/T2423.8-1995 ISTA 2A-2006	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL

#### 1.2 试验仪器 Test Instrument


试验项目 Item	试验仪器 Test Instrument	型号 Model No.	生产厂家 Manufacturer
低温试验 Low Temperature Test	高低温（湿热）试验箱 High and low temperature (Damp Heat) test chamber	SMC-225PF	东莞市皓天实验设备有限公司 Dongguan HAOTIAN Testing Equipment Co., Ltd.
高温试验 High Temperature Test			



**Environment Compatibility Verification Test**

Temp./Humidity	25℃	Temp. Range	-20℃ +70℃
Experiment Period	32H	Test Engineer	Yangw
Performance Requirement	A		

Line Chart as below:

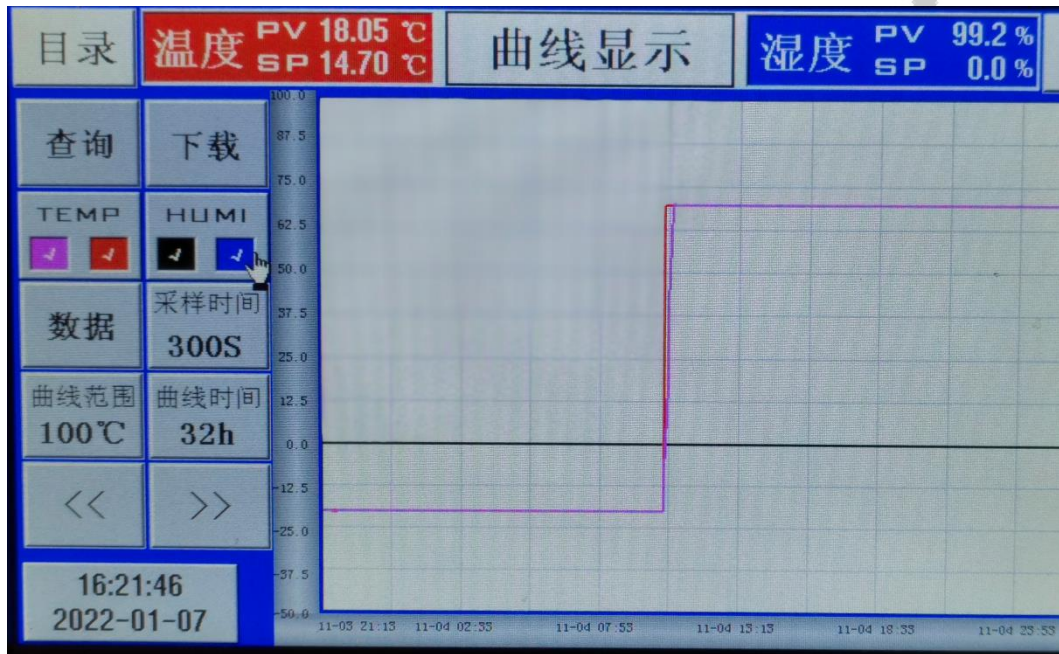


Real-time Monitoring Curved Line

Result:	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL
---------	--	-------------------------------



## VI.EMC Test:

### Radiated Emission Test Result

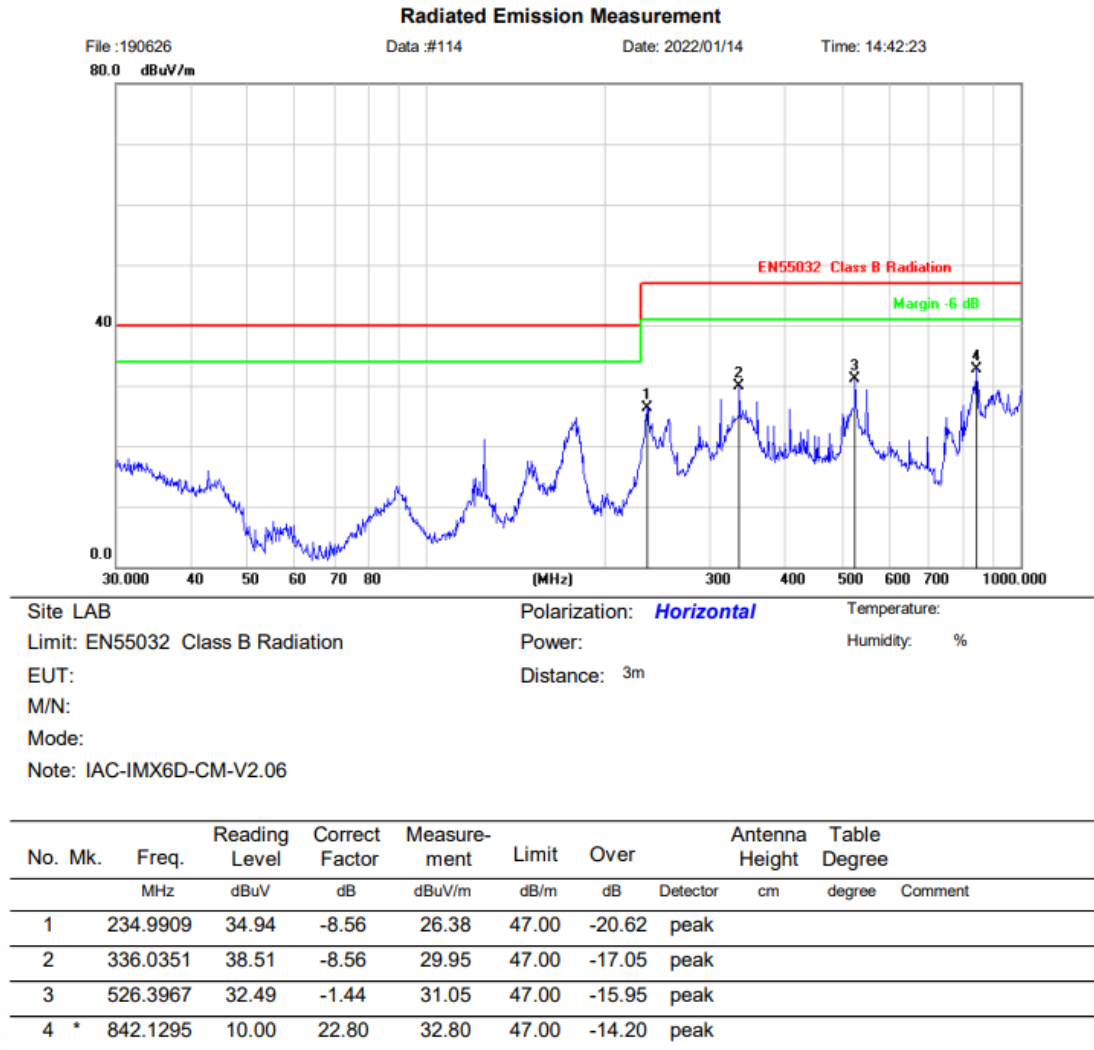

Radiation Test Result: Horizontal Polarization Direction

### Radiated Emission Measurement


File :190626

Data :#115

Date: 2022/01/14

Time: 14:43:32

80.0 dBuV/m

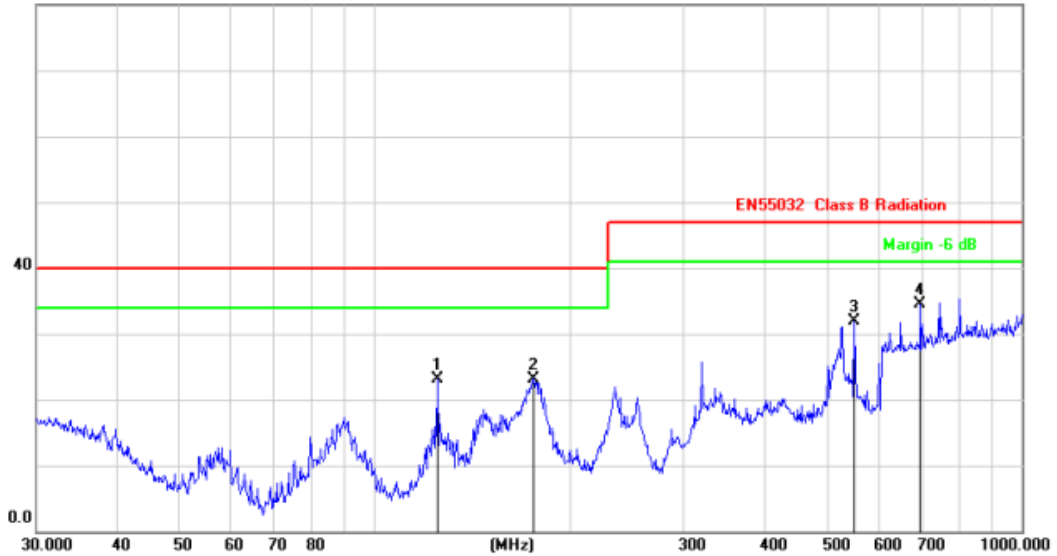

Site LAB

Limit: EN55032 Class B Radiation

EUT:

M/N:

Mode:

Note: IAC-IMX6D-CM-V2.06

Polarization: **Vertical**

Power:

Distance: 3m


Temperature:

Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		125.0066	40.96	-17.95	23.01	40.00	-16.99	peak			
2		176.2685	33.91	-10.71	23.20	40.00	-16.80	peak			
3		550.9479	38.05	-6.08	31.97	47.00	-15.03	peak			
4	*	696.8567	11.94	22.65	34.59	47.00	-12.41	peak			


Radiation Test Result: Vertical Polarization Direction

## Conductivity Test

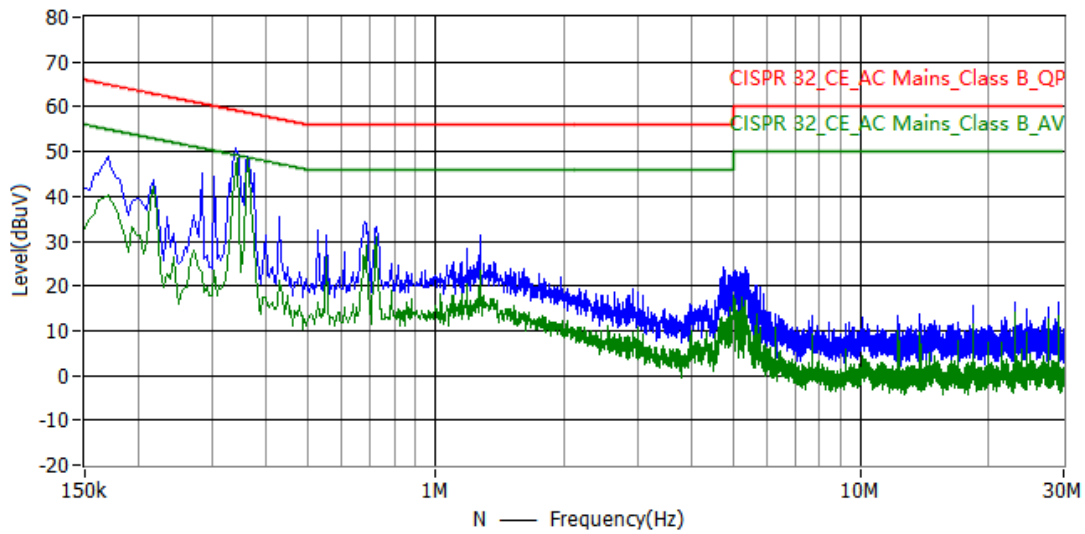

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1*	170.000 kHz	65.0	48.9	-16.1	10.1	PK	N
2*	218.000 kHz	62.9	43.7	-19.1	10.0	PK	N
3*	282.000 kHz	60.8	45.2	-15.5	10.0	PK	N
4*	338.000 kHz	59.3	50.8	-8.5	10.0	PK	N
5*	374.000 kHz	58.4	45.2	-13.2	10.0	PK	N
6*	682.000 kHz	56.0	34.2	-21.8	9.9	PK	N
7*	170.000 kHz	55.0	40.3	-14.6	10.1	AV	N
8*	194.000 kHz	53.9	33.2	-20.7	10.0	AV	N
9*	218.000 kHz	52.9	42.3	-10.6	10.0	AV	N
10*	362.000 kHz	48.7	48.0	-0.7	10.0	AV	N
11*	554.000 kHz	46.0	26.3	-19.7	10.0	AV	N
12*	726.000 kHz	46.0	30.8	-15.2	9.9	AV	N

Conductivity Test Result: Negative- IAC-IMX6-CM V3.01

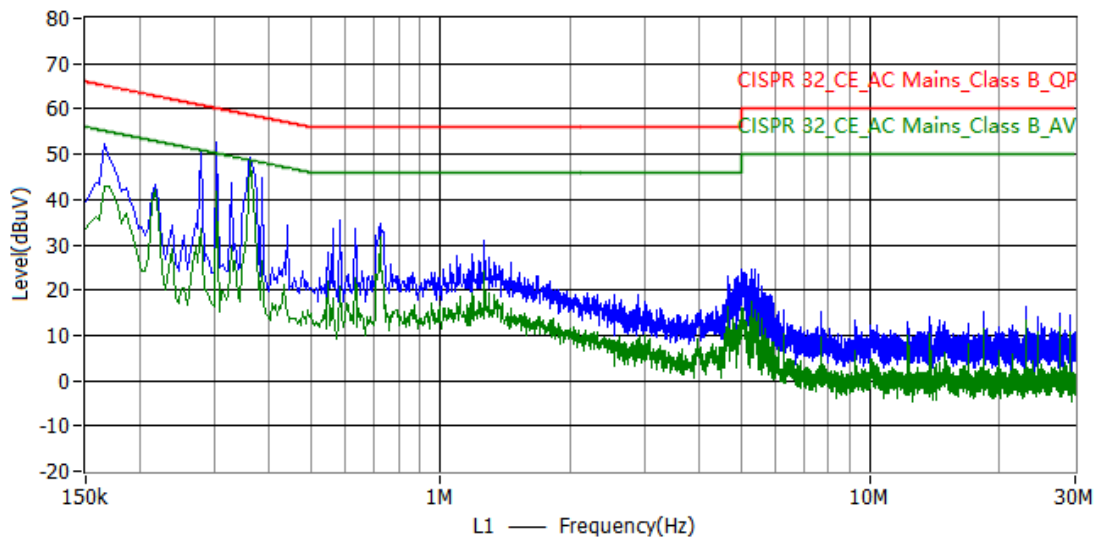

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Factor dB	Detector	Phase
1*	166.000 kHz	65.2	52.2	-13.0	10.1	PK	L1
2*	218.000 kHz	62.9	43.4	-19.5	9.8	PK	L1
3*	302.000 kHz	60.2	52.8	-7.4	9.9	PK	L1
4*	362.000 kHz	58.7	49.3	-9.4	10.0	PK	L1
5*	586.000 kHz	56.0	35.5	-20.5	10.0	PK	L1
6*	726.000 kHz	56.0	34.5	-21.5	10.0	PK	L1
7*	170.000 kHz	55.0	43.0	-11.9	10.1	AV	L1
8*	218.000 kHz	52.9	42.3	-10.6	9.8	AV	L1
9*	270.000 kHz	51.1	29.4	-21.7	9.9	AV	L1
10*	302.000 kHz	50.2	41.7	-8.5	9.9	AV	L1
11*	362.000 kHz	48.7	48.2	-0.4	10.0	AV	L1
12*	726.000 kHz	46.0	31.7	-14.3	10.0	AV	L1

Conductivity Test Result: Positive- IAC-IMX6-CM V3.01

## VII. Software Description

IAC-IMX6-CM provides the software support for Android OS &Linux OS

The ***IAC-I.MX6-Kit User Manual*** will introduce the IAC-I.MX6-KIT mainboard's setting up and using in Android/Linux developing environment. The detailed content could refer to the relative documentation.

## VIII. Remark

1. Before connecting to LCD, please confirm the power specification of LCD module.
2. Please use the original connecting accessories to avoid damaging the main board.
3. We ensure offering communication technology support through E-mail, telephone for lifelong technical support service.
4. We ensure offering 6 months repair service for free, if malfunction occurs in warranty because of quality problem, contact our retailer or our company with purchase receipt in warranty period, we will repair or replace it.
5. Under these circumstances, we do not offer repair for free:
  - Over warranty time;
  - Do not have purchase receipt;
  - Liquid inlet, Damp or Mold;
  - Malfunction and damage is not due to product quality but drops, intense sharking, arbitrarily modify, disoperation after purchase;
  - Damage of force majeure.
6. We reserve intellectual property for the software and hardware technical data of IAC-IMX6-KIT; users can only use them for teaching, testing, researching. Shall not be engaged in any commercial purpose. Shall not distribute them on the Internet. Shall not intercept, modify them to tamper copyright.
7. We accept batch order; we can offer comprehensive technical support and service.

## Zhejiang Qiyang Intelligent Technology Co., Ltd

**Tel:** 86-571-87858811 / 87858822

**Fax:** 86-571-89935912

**Technical Support :** 0571-87858811 ext.805

**E-MAIL :** [supports@qiyangtech.com](mailto:supports@qiyangtech.com)

**Website :** <http://www.qiyangtech.com>

**ADD:** 3rd floor, Building A, WSCG Building, NO.6 Xiyuan 8th  
Road, Sandun Town, Xihu District, Hangzhou City,  
Zhejiang China

**Postal Code :** 310013



